



# WAVES

Series 0058 · Soft Forms collection — continuous wave relief

SOFT FORMS

A1 · EN 13501-1



WAVES — undulating relief running continuously across the wall; supplied white, painted on site.

## KEY FACTS — PER PANEL

### PANEL SIZE

**500 × 500** MM

### THICKNESS

**25** MM

### WEIGHT PER PANEL

**4.0** KG

### COVERAGE PER PANEL

**0.25** M<sup>2</sup>

### PANELS PER M<sup>2</sup>

**4** PCS

### SUPPLIED AS

**PACK OF 3** PANELS

## MATERIAL & COMPOSITION

- Reinforced gypsum fibre board — EN 15283-2:2008+A1:2009
- Mineral composition · no harmful additives
- Mean density 1130 kg/m<sup>3</sup> (EN 15283-2)
- Supplied white, unfinished — painted on site in any colour
- For dry interior walls and ceilings


## REACTION TO FIRE

**A1**


Classified **A1 (EN 13501-1)** — the highest fire rating under European fire safety standards. Non-combustible.

Classification report No. 1871-CPR-RtF-921 · CTEC Ltd, Notified Body 1871 · AVCP System 3 · Tested to EN ISO 1182 / EN ISO 1716

## THE PATTERN — ONE SURFACE, NO VISIBLE JOINTS

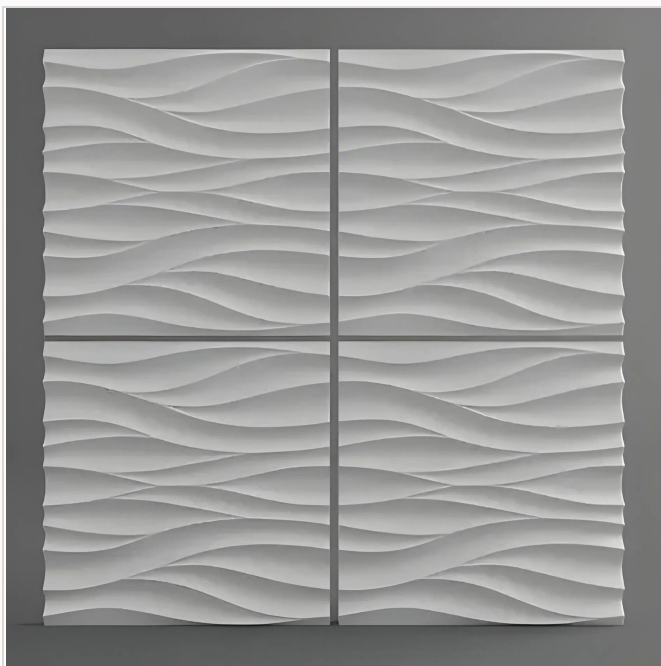

FOUR PANELS TILED — THE RELIEF FLOWS ACROSS THE JOINTS

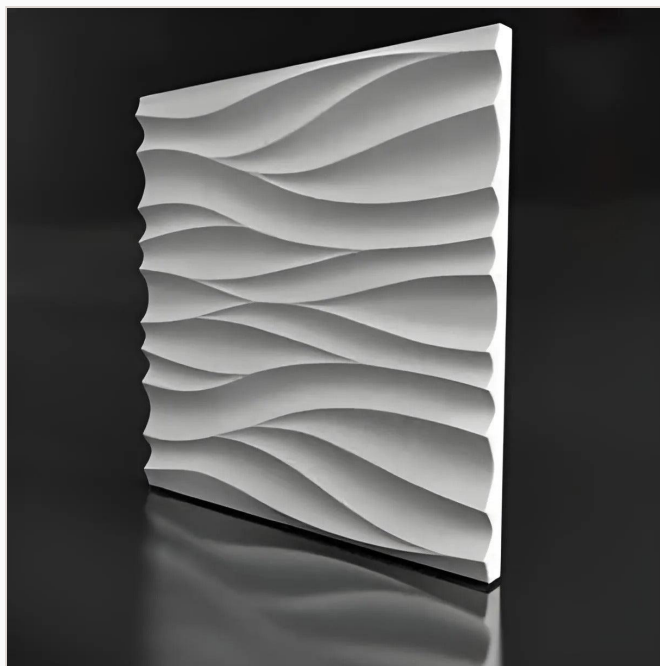

SINGLE PANEL · 500 × 500 MM

### SOFT FORMS — DESIGNED FOR CONTINUITY

WAVES belongs to the Soft Forms collection: flowing, organic relief designed to run continuously across the wall. Once the joints are filled and the surface is painted, the individual panels merge into one unbroken sculptural surface.

#### INSTALLATION SUMMARY

- 1 Acclimatise.** Keep panels in their original packaging, stored vertically as delivered, for 24 hours in the room before installation. Unpack immediately before installing.
- 2 Bond.** Fix to a firm, level, clean substrate with gypsum-based adhesive; mechanical fixing where required.
- 3 Fill joints.** Use a fine, soft filler paste — not the adhesive gypsum putty.
- 4 Finish.** Sand and prime the filled joints.
- 5 Paint.** On site, in any colour.

Any skilled tiler or plasterer can handle the installation.

#### STORAGE & HANDLING

- Store vertically in the original packaging, as delivered on the pallet — never flat
- Dry interior storage, 15–25 °C, 40–60 % RH
- Protect from moisture and direct water contact

#### DELIVERY

**IN STOCK**

**HANDLING 1–3 BUSINESS DAYS**

**EU DELIVERY 5–10 BUSINESS DAYS**

Custom requests may require additional lead time.

#### RELATED DOCUMENTATION

Declaration of Performance (DoP)

Technical Data Sheet — product family

Compliance Summary Report

Installation guide & videos

Request the complete document pack via “Get the spec sheets” on the product page, or write to [info@kandes.ch](mailto:info@kandes.ch). The EN 13501-1 fire classification report (No. 1871-CPR-RtF-921) is available on request.